



Hotel Electronic Safe


! Please do not keep emergency keys in your safe!

Dear valued customer:


Thank you for choosing our products! You've taken an important step in organizing and protecting your most valued possessions. Every series of our safes is professionally made and designed to provide safety. Please take time to read and familiarize yourself with the proper operating procedures of your new safe presented on the following pages.

Again, thank you for choosing our products!

Schematic drawing of case

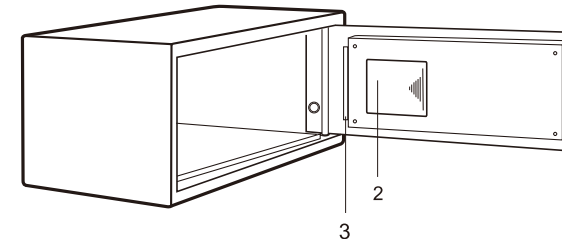

Schematic drawing of control panel

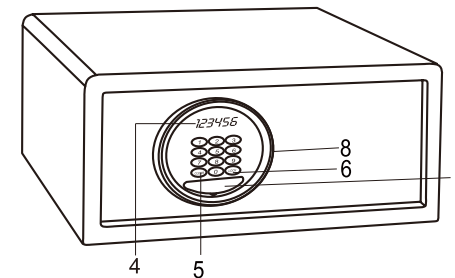

- 1. Bolts
- 2. Battery Compartment
- 3. LED light
- 4. Display
- 5. Clearing key
- 6. Locking key
- 7. Emergency key cover
- 8. USB (for CEU)

Press "8" to leap to the next record
 Press "4" to show the previous content on the screen
 Press "6" to show the following content on the screen
 Press "5" to go to the latest closing & opening record
 Press "CLEAR" to close this program

For example: July 30, 2015, 16:01:30, open the safe use master code
 The screen will show:

year		month		date	
1	5	0	7	3	0

Press "6" to show the following content.

hour		minute		—	open way
1	6	0	1	—	2

"1": open the lock with the user code.
 "2": open the lock with the master code
 "3": open the lock with the CEU
 "4": open the lock with the key
 Press "CLEAR" to close this program.

For any help, kindly consult the local distributor

POWER SUPPLY

Battery

- The working voltage for the product is equal to 4 AA batteries.
- System will turn into micro power consuming state automatically.

⚠ CAUTION: When replacing batteries, do replace all the batteries at once and never use old and fresh batteries together. Never mix the specified batteries with other types of batteries in use.

Using personal code to close and open the safe

- Enter any 4 digit number then press the “LOCK” key, the word “CLOSED” appears and the safe will be closed
- Enter your 4 digit number then the word “OPENED” appears and the safe will be open.

Using master code open the safe

Press “LOCK” twice and “SUPER” appears, then input “011223”, the safe will be opened.

Setting the master code

Keep the door open, Press “CLEAR” twice, and “PROG” appear. Input “842627”+ “LOCK”, and “OLD” appear. Input the old master code (Note: the original master password is “011223”) + “LOCK”, and “NEW” appears. Input 6 new digit master code + “LOCK”, and “GOOD” appears; which means the master code has been changed successfully

Setting date and time

Keep the door open, press “CLEAR” twice, and then input “055261” +“LOCK”, then DATE appear on the screen. And the clock-setting program starts
Data firstly showed on the screen:

year		month		date	
0	0	0	0	0	0

Example: press 150730 means July 30, 2015

year		month		date	
1	5	0	7	3	0

Then press “LOCK” to confirm.

Data secondly showed on the screen:

hour		minute		second	
0	0	0	0	0	0

Example: press 160130, mean 16(h):01(m):30(s)

hour		minute		second	
1	6	0	1	3	0

Then press “LOCK” to confirm, and “GOOD” appears on the screen.

Opening the safe in emergency

Once the electronic circuit malfunctioned or codes unknown. You could also use the override key to open the safe.

Read closing & opening records

This program can enquire 100 pieces of records.
Keep the door open, press “CLEAR” twice +“162550” + “LOCK”, then “RECORD” appears, and the closing & opening records enquiry program starts.
The records will show in two screens. The functional keys are as follows:
Press “2” to go back to the before record