

GA95 HITCHLOCK FITTING INSTRUCTIONS


(Patent applied for)

FITTING

1. To remove the lock, insert the key and turn clockwise until key stops then pull gently to remove lock.



2. With the stabiliser handle in the upright position, lift the hitch handle and insert the dummy ball.

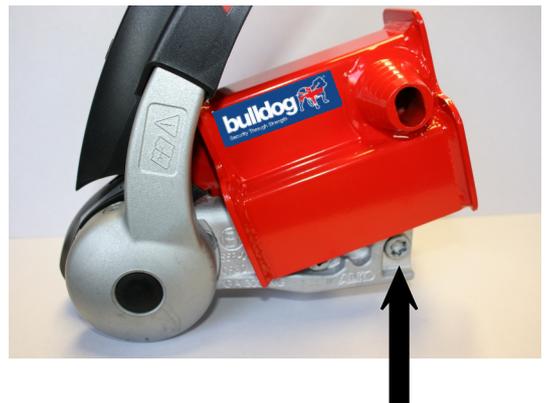

3. Tilt the hitchlock to locate the front lip into the recess at the front of the handle. Once in position, lower the hitchlock over the handle.



(Please Note: If there are 2 or more threads protruding from the nut, the length of the bolt will have to be reduced for the hitchlock to fit)

4. Partially insert the lock and turn the key a quarter turn and gently push into the lock housing.

Should you wish to obtain additional keys, a local locksmith may be able to copy one of the original keys.

Bulldog Security Products

Units 1 - 4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.
Tel: 01952 728171 Fax: 01952 728117
Email sales@bulldogsecure.com www.bulldogsecure.com

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.