



INNOVATIVE SAFE
FOR CERTIFIED
GRADE II BURGLARY
PROTECTION



PROGUARD GII

BURGLARY-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade II.
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access to the safe.
- Every model can be customised with a range of internal fittings to maximise storage capacity.
- ProGuard has a modern design with an ergonomic soft-touch handle.

PROGUARD GII

PRODUCT SPECIFICATIONS

Model	External height (mm)	External width* (mm)	External depth** (mm)	Internal height (mm)	Internal width*** (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)
60	530	500	521	430	400	360	62	237
110	690	600	561	590	500	386	114	346
150	875	600	561	775	500	386	150	426
200	1150	600	561	1050	500	386	203	519
300	1600	600	561	1500	500	386	290	676
350	1600	675	585	1500	575	410	354	764
450	1850	675	616	1750	575	440	443	895

Projection of hinge* (20mm) and handle** (65mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 15mm

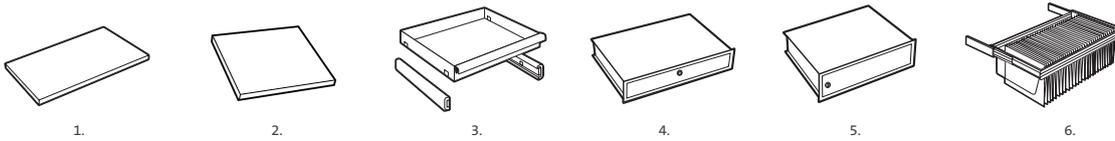

INTERNAL FITTINGS

1. Shelf - 20mm high - all sizes - max capacity 60kg
2. Reinforced shelf - 20mm high - all sizes - max capacity 120kg
3. Extendable shelf - 37mm high - sizes 110-450
4. Full width drawer - 100mm high - sizes 110-450
5. Lockable cupboard - 335mm high - sizes 110-450
6. Pull out file frame - 37mm high - sizes 110-450

LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

Dual locking is available from model 110. The primary lock can be complemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection in Grade II. A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.



Approved by the Association of Insurance Surveyors

ACCREDITED BY SECURED BY DESIGN



Secured by Design is the only way for products to achieve police accreditation in the UK.

In order to achieve Secured by Design status the ProGuard range of safes has to adhere to rigorous test standards required by the police.

Authorised dealer

www.chubbsafes.com